


Mixer / Pump

MX-20CM

Take control of your refractory installations
When you want it ... How you want it!

Can be used for:

Refractory Pumpcast Applications
Refractory Shotcrete Applications
¾" Aggregate Shotcrete

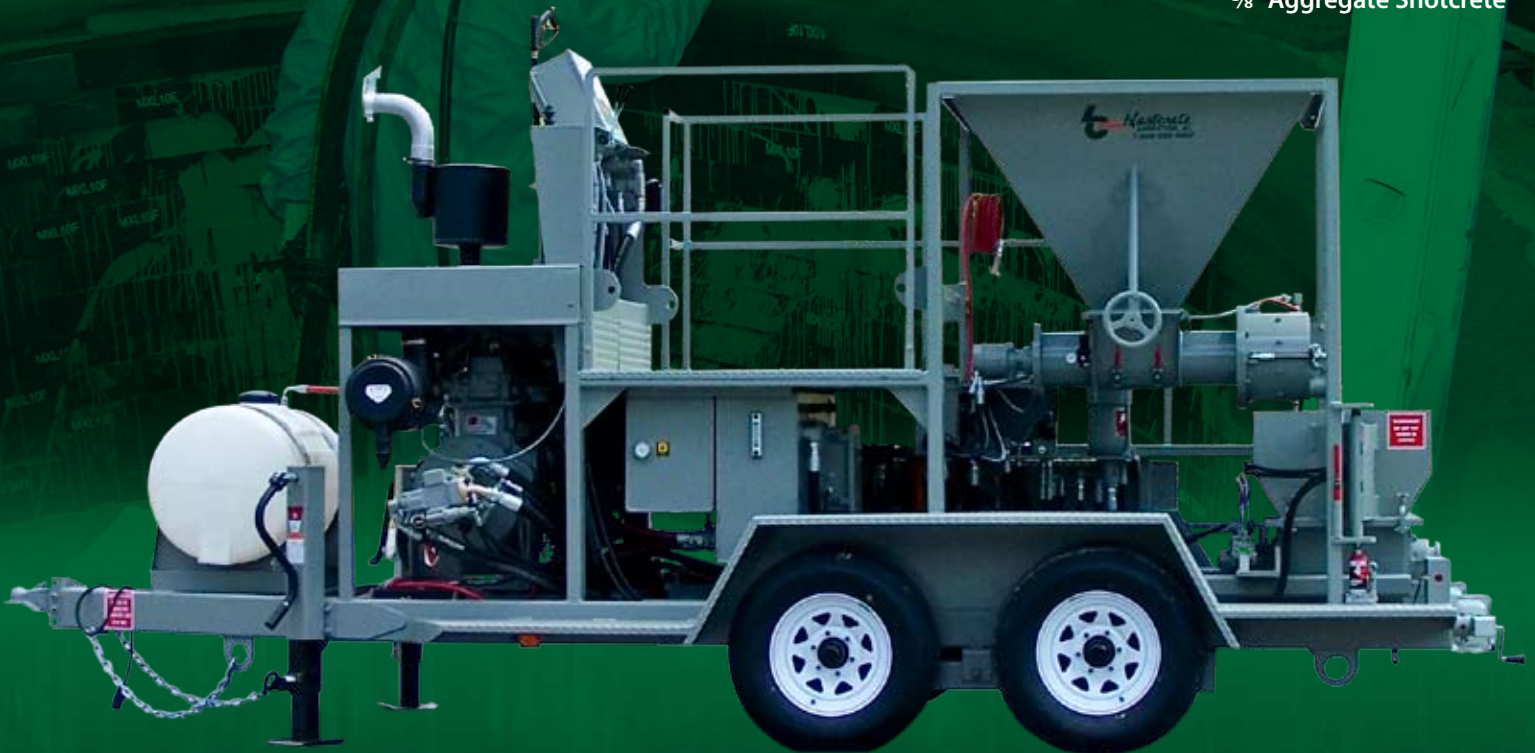

Blastcrete Refractory Pumps are the
most economical,
versatile, simple, and safe
Refractory pumps ever built!



Anniston, AL
800-235-4867
www.blastcrete.com



Standard swing out receiving hopper



Reliable shotcrete delivery up to 25 tons per hour



Fastest return on investment

Features

- 2200 PSI Piston Face Pressure
- High Shear Continuous Mixer with 25 ton per hour output
- Swing Out Receiving Hopper for Easy Cleaning and Maintenance
- Forklift Tubing for Easy Flat Pack Removal
- 0-20 gallon Flow Meter
- Reliable Solid State Electronic Controls
- Simple Overhead Crane Pick Up
- CE Certification

Options

- 2,000 PSI Hydraulic Pressure Washer
- Vogel Auto Lubrication System
- Spare Tire Mounted
- Pendant Remote
- Skid Mounted with Forklift Tubing

Specifications

Pump	4" x 36" Swing Tube
Pumping Pressure	2200 psi
Mixer/Pump Output	0-25 tons per hour
Dry Hopper	3000 lb. Capacity
Receiving Hopper	1500 lb. Capacity
Crane Pickup	4 point center pickup
Electrical	Solid State
Trailer	Dual 6,000 lb. Axles
Dimensions	220" X 89" X 108"
Weight	7500 lbs.

Power Options

- 99 HP John Deere Water Cooled Diesel
- 102 HP Deutz Water Cooled Diesel
- Dual Electric Motors