




D3522 Epoxy Pump Attachment

The industry standard for pumping your hot epoxy mixes!

Can be used for:

Hot Epoxy Mixes
Cementitious Grouts
Shotcrete
Cellular Concrete
Block Fill

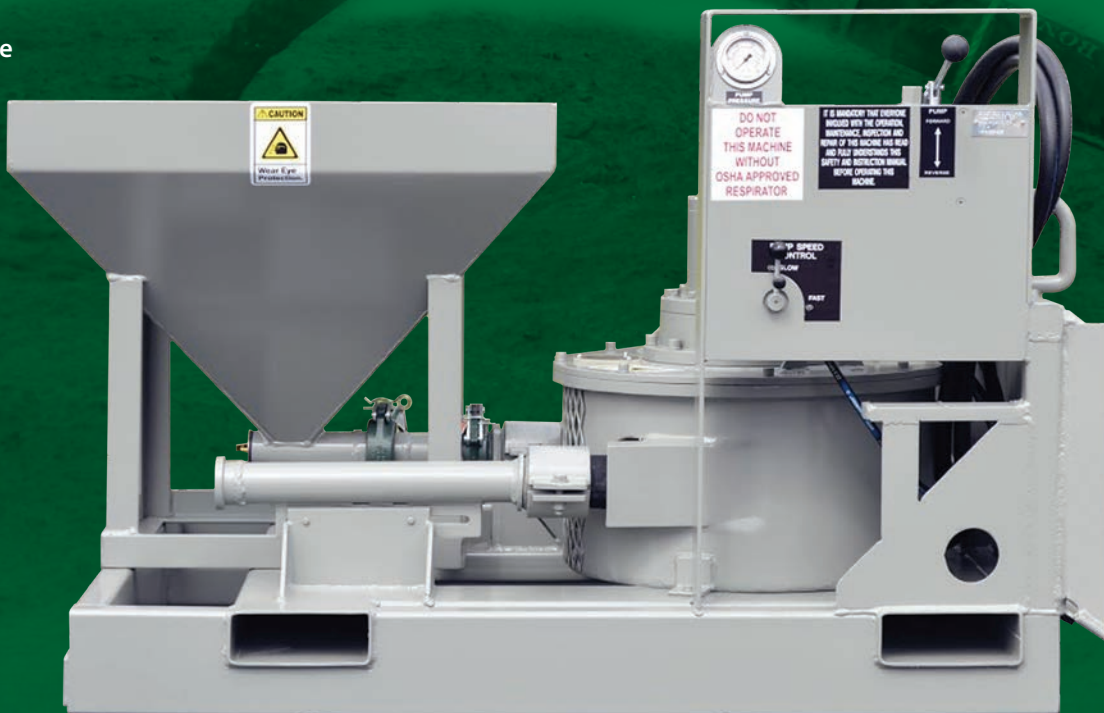

Features

- Infinitely variable speeds from 0- 6 yd³ (4.6 m³) per hour
- 400 psi (28 bar) pumping pressure
- Simple 2" (5 cm) hydraulic squeeze pump with heavy-duty planetary gearbox drive
- Lowest cost pump to purchase, own and operate
- Longest-lasting pumping tubes in the industry
- Universal mounting plate and forklift pickup
- Optional round receiving hopper

Specifications

Length	60" (152 cm)
Width	48" (122 cm)
Height	35" (89 cm)
Output capacity	0-6 yd ³ /hr. (4.6 m ³ /hr.)
Hydraulic oil requirement	10 GPM @ 3,000 PSI (38 LPM @ 207 bar)

Blastcrete Equipment Company 2000 Cobb Avenue P.O. Box 1964 Anniston, AL 36202
800-235-4867 (Toll Free) 256-235-2700 256-236-9824 (Fax) www.blastcrete.com